Safety Railings and Safety Hoops · Standard Safety Railings

Universal Guard Rail Child-Safe

Universal Guard Rail Child-Safe from Weland Stål is a modular railing for spaces where children are present and safety requirements are extra high.









KEY FACTS

Length	400–2000 mm
Height	1100 mm
Finish	Hot-Dip Galvanized / Galvanized
Upright/top rail Ø	42 mm
Weight	8.9–32.1 kg

- Round bars with a maximum gap of 100 mm between the upper and lower rails
- Non-climbable
- Rail sections in six stocked standard lengths that can be combined with one another
- Corner section 400 × 400 mm for 90° corners
- Delivered as separate units for assembly on site


DESCRIPTION

The railing has round bars with a maximum gap of 100 mm and no horizontal rails to step on, so it cannot be climbed. It is used in residential areas, at schools and nurseries, around playgrounds and school grounds, and along footpaths and cycle paths.

FEATURES

- Same fixings and couplers as the universal guard rail for industrial use

DIMENSIONS

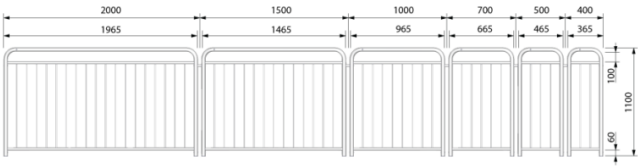

SUITABLE FOR THESE ENVIRONMENTS

- Residential areas & housing associations
- Schools & nurseries
- Playgrounds & school grounds
- Footpaths & cycle paths

VARIANTS

Item no.	Length	Weight
UB0442	400 mm	8.9 kg
UB0542	500 mm	10.4 kg
UB0742	700 mm	13.3 kg
UB1042	1000 mm	17.8 kg
UB1542	1500 mm	25 kg
UB2042	2000 mm	32.1 kg
UB4042	400 mm	13.8 kg

All variants: Height 1100 mm · Finish Hot-Dip Galvanized / Galvanized · Upright/top rail Ø 42 mm · Bottom rail Ø 28 mm

TECHNICAL DATA

Bottom rail Ø	**28 mm**

MOUNTING AND FIXING

The sections are placed end to end and joined with a tube coupler, or with a gull-wing coupler where the railing changes direction at an angle other than 90°. The railing is usually mounted with floor brackets or side brackets. Ground brackets for gravel and soil, L-support brackets for retaining walls, an internal spigot for cast-in installation and concrete foundations for temporary barriers are also available. The mounting instructions can be found under the Documents and certificates tab.

Free-standing mounting
BF2000

Floor mounting
UG1000, UG2000

Cast-in mounting
UT3100

Ground mounting
UM1000, UM2000

Side mounting
UV1001, UV1002

Retaining wall mounting
UL1000, UL2000

MATERIAL AND DURABILITY

All material is steel, hot-dip galvanized to SS-EN ISO 1461, which corresponds to class 3 in BSK07. The railing is also available powder-coated in any colour of your choice or in stainless steel.

FREQUENTLY ASKED QUESTIONS

What is the difference between the child-safe railing and the industrial railing?
The child-safe railing has round bars with a maximum gap of 100 mm instead of an open section with a single horizontal rail. Lengths, height, posts and fixings are the same.

How do I make a corner?
For 90° corners, use the 400 × 400 mm corner section. For other angles, two sections are joined with a gull-wing coupler.

Can I mix child-safe sections with industrial sections?
The sections have the same lengths, post spacing and couplers, so they fit together. However, the railing is only child-safe where the child-safe sections are installed.

All documents, prices and stock status are on the product page

nordguard.eu/product/universal-guard-rail-child-safe

Questions? Call +46 10 153 90 50 on weekdays 07:30–17:00 (CET) or email info@nordguard.eu