

TECHNICAL CHARACTERISTICS

- > 3 finishes and 5 diameters to choose from
- > Steel tube: Ø 60, 76, 90, 114 or 160 mm
- > Tube thickness: 3 mm (except Ø 160 mm : thickness 4 mm) with a welded domed top

INSTALLATION

- > Concreted directly into the ground (depth 180 mm, rebar not supplied, except Ø 160 mm: depth 230 mm, rebar not supplied)

OPTION

- > Can be made removable with Lockblock® 21 (except Ø 60 mm or Ø 160 mm)

PRODUCT CODES AND DIMENSIONS

		Galvanised	Galvanised & painted	Zinc primed & painted
Ø 60 mm	HAG 1100 mm	204320	204330	204660
Ø 76 mm	HAG 1000 mm	204360	204364	204661
Ø 90 mm	HAG 1000 mm	204350	204351	204662
Ø 114 mm	HAG 1000 mm	204391	204395	204663
Ø 160 mm	HAG 1000 mm	204680	204681	204682


FINISH PAINTED

- > Galvanised finish, galvanised and painted or zinc primed and painted in our colours

				
RAL 3020	RAL 3004	RAL 5010	RAL 6005	RAL 8017
				
RAL 7044	RAL 9010	RAL 9005	PROCITY® Grey	Corten effect



INSTALLATION DRAWING

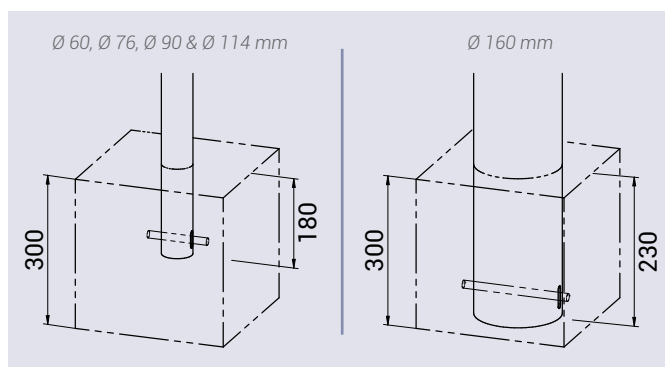

Lockblock® 21

Dome top bollard
Ø 60 mm



Dome top bollard
Ø 76 mm



Dome top bollard
Ø 90 mm



Dome top bollard
Ø 114 mm



Dome top bollard
Ø 160 mm

