

Universal Guard Rail floor mount


MA3002

Page 1 (1) | Version 2 - 200603


	Detail	Item no.
1	Railing	See table
2	Single mount	UG1000
3	Double mount	UG2000
4	Locking washer	UL4201
5	Bolt M10x20	BU1201/BU1200
6	Flange nut M10	MU1001/MU1010

	Detail	Item no.
7	Kick plate	SL0410/SL0510/SL0710/SL1010/SL1510/SL2010
8	Self-drilling screw 5,5x22	SS5221/SS5225
9	Gull-wing coupling	MK4200
10	Tube coupling	KP4277

Edge distances apply to M12 expansion anchors in concrete

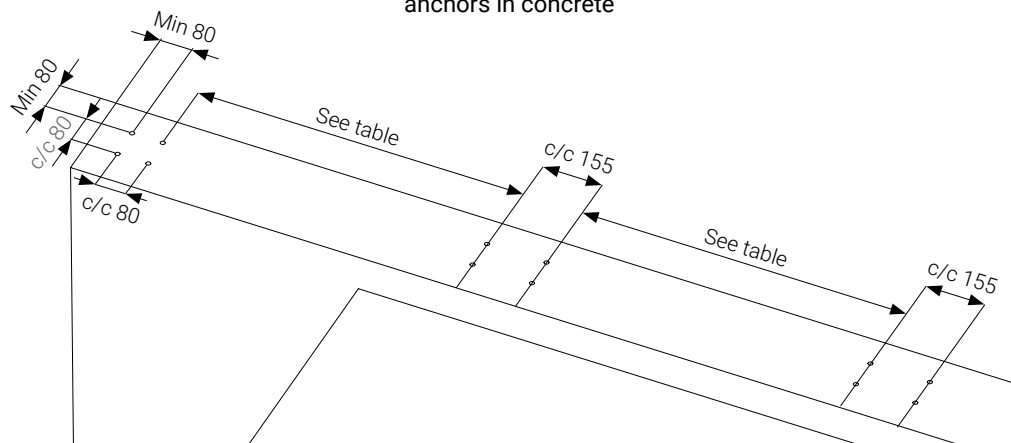


Railing	c/c
UI2042 / UB2042	1845
UI1542 / UB1542	1345
UI1042 / UB1042	845
UI0742 / UB0742	545
UI0542 / UB0542	345
UI0442 / UB0442	245

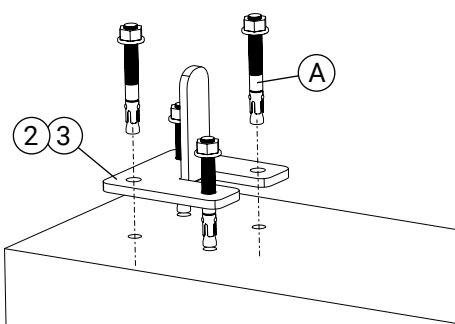


1. Installing the mount

Screw the mount (2,3) with 4 fastenings (A) per mount.
Note! Fastenings not included.

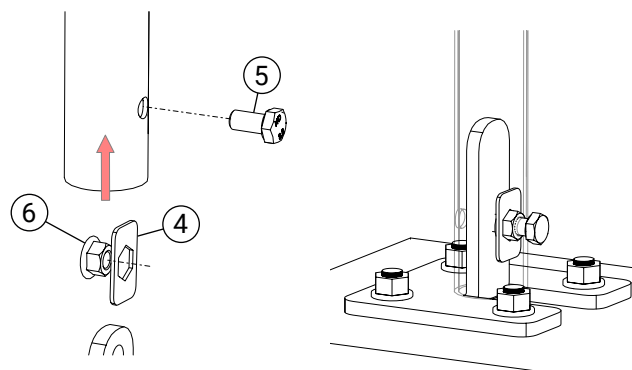


2. Installing the railing lock

Assemble a nut (6) + locking washer (4) into a railing lock. Insert into the railing tube and fit a bolt (5).

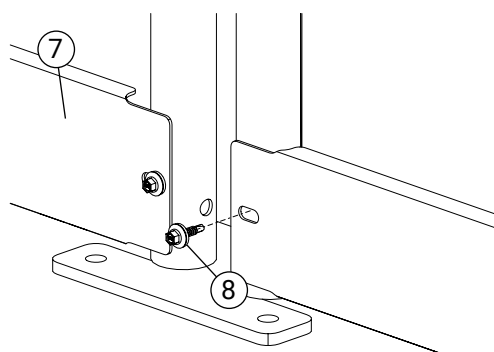

3. Installing the kick plate

Any kick plate (7) is fitted with 2 self-drilling screws (8).

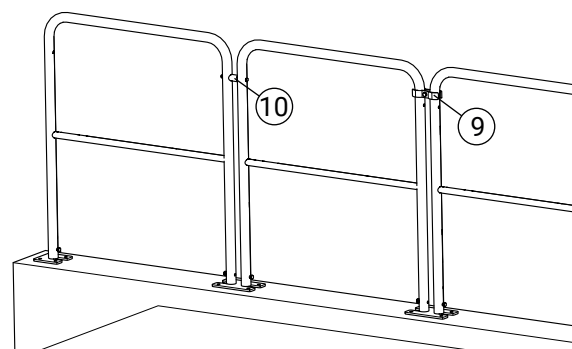

4. Installing couplings

Fit a gull-wing coupling (9) or tube coupling (10) between the railings.