


Universal Guard Rail L-Support Mount


	Detail	Item no.
1	Railing	See table
2	Single mount	UL1000
3	Double mount	UL2000
4	Locking washer	UL4201
5	Bolt M10x20	BU1201/BU1200
6	Flange nut M10	MU1001/MU1010

	Detail	Item no.
7	Kick plate	SL0410/SL0510/SL0710/SL1010/SL1510/SL2010
8	Self-drilling screw 5,5x22	SS5221/SS5225
9	Gull-wing coupling	MK4200
10	Tube coupling	KP4277

Fits L-supports max 100 mm

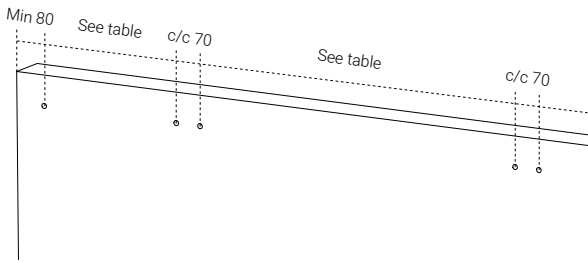


Railing, single to double mount	c/c mm	Railing, double to double mount	c/c mm
UI 2042/UB2042	1888	UI 2042/UB204	1926
UI1542/UB1542	1388	UI1542 / UB1542	1426
UI1042/UB1042	888	UI1042 / UB1042	926
UI0742/UB742	588	UI0742 / UB0742	626
UI0542/UB542	388	UI0542/UB542	426
UI0442/UB442	288	UI0442/UB442	326

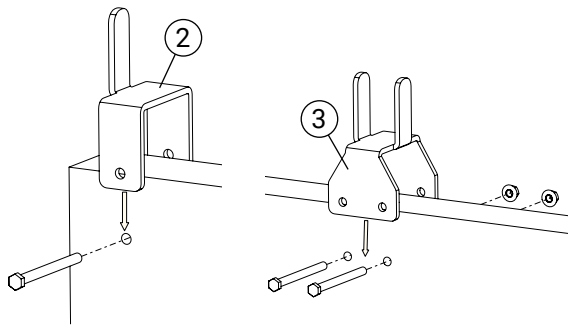

Installing the mount


Screw the mount (2,3) with 1 or 2 M12 through-bolts per mount.

Note! Fastening bolt not included.

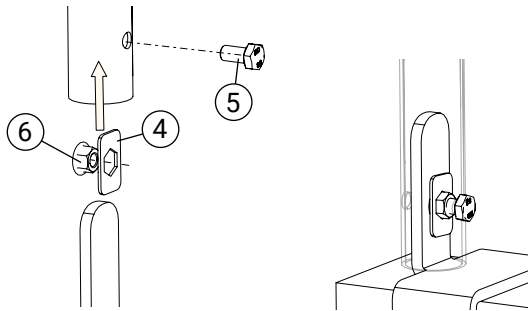


Installing the railing lock

Assemble a nut (6) + locking washer (4) into a railing lock. Insert into the railing tube and fit a bolt (5)

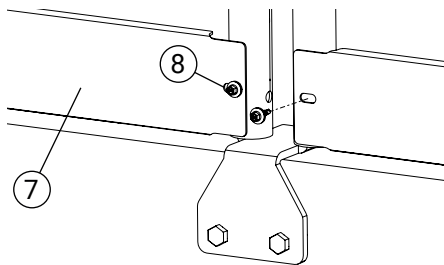

Installing the kick plate

Any kick plate (7) is fitted with 2 self-drilling screws (8).

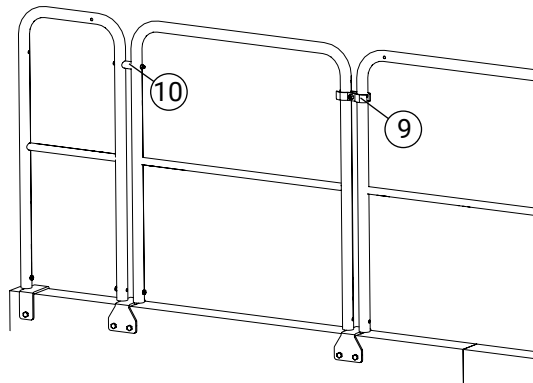

Installing couplings

Fit a gull-wing coupling (9) or tube coupling (10) between the railings.