Safety Railings and Safety Hoops · Standard Safety Railings

Build your child-safe universal guard rail

The Child-Safe Universal Guard Rail from Weland Stål is a modular railing for places where children are present, such as residential areas, schools, nurseries and playgrounds.









KEY FACTS

Item no. **NG-URB**

DESCRIPTION

The railing has round bars with a maximum gap of 100 mm and cannot be climbed. It is built from Weland's child-safe railing sections in six standard lengths (400–2,000 mm), 1,100 mm high, with posts and top rail in Ø42 mm, mid rails in Ø28 mm and round bars in Ø12 mm.

In the configurator, you draw the railing exactly as it will be installed, choose the mounting to suit the surface and add corners. The parts list with sections, corner sections, brackets, couplings and screws is calculated automatically and is sent with your order together with the drawing.

Enter the dimensions or build the shape run by run. You see corners and angles instantly in 3D.


Choose which sections the railing may be built with, for example if you only want 2,000 mm sections.

Sections, brackets, couplings, screws and washers are calculated automatically and shown in the parts list.

Download a dimensioned drawing with plan, front and side views and parts list.

Add the entire parts list to your basket or send the drawing for a quotation with project pricing.

DIMENSIONS

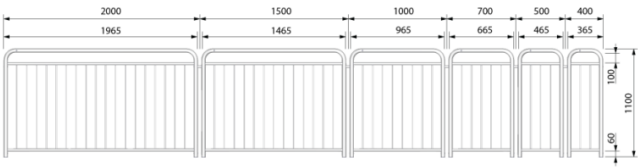

FREQUENTLY ASKED QUESTIONS

Is this Weland's child-safe universal guard rail?
Yes. The sections, corner section, brackets and couplings are Weland Stål's child-safe universal guard rail, and the parts list uses Weland's article numbers (for example UB2042 for the 2,000 mm section).

Can I get an exact length?
The railing is built from whole sections (400, 500, 700, 1,000, 1,500 and 2,000 mm), so any length in 100 mm increments from 800 mm can be built exactly. If you need a length in between, you cut a section on site, between two round bars, and join it using joint kits: one SK4200 on the top rail and two SK2700 on the mid rails. The configurator places the joint midway between two round bars, so the gap never exceeds 100 mm, and adds the kits to the parts list.

Is there a gate and kick plate for the child-safe railing?
No, the configurator builds the child-safe railing without a gate or kick plate. If you need them, choose the Industrial railing type at the top.

Which mounting should I choose?
Floor bracket on existing concrete, side bracket against an edge or beam, ground bracket in gravel and soil, cast-in for new concrete, L-support bracket on a retaining wall, and concrete foundation when the railing is to be free-standing or moved.

Are bolts for the surface included?
Bolt sets, nuts and lock washers for the brackets are included in the parts list. Expansion anchors or chemical anchors for concrete and asphalt can be chosen from the accessories below the configurator.

All documents, prices and stock status are on the product page

nordguard.eu/product/build-your-child-safe-universal-guard-rail

Questions? Call +46 10 153 90 50 on weekdays 07:30–17:00 (CET) or email info@nordguard.eu